UNIFORM STATUTORY DECLARATION FORM FOR THE REGISTRATION OF FITTING DESIGNS

NEW BRUNSWICK NUNAVUT NOVA SCOTIA YUKON PRINCE EDWARD ISLAND NORTHWEST TERRITORIES

NEWFOUNDLAND AND LABRADOR

MANUFACTURERS NAME: Swagelok Company	
MANUFACTURERS ADDRESS: 29500 Solon Road, Solon, Ohio 44139-3492	
PLANT LOCATIONS: Headquarters: 29500 Solon Road, Solon, Ohio 44139-3492 (See At	tachmont A)
CATEGORY OF FITTINGS TO BE REGISTERED. CIRCLE ONE CATEGORY ONLY	TITLE OF THE STANDARD OF CONSTRUCTION
A Pipe fillings, including couplings, tees, elbows, Ys, plugs, unions, pipe caps, or reducers E Flanges: all line valves D Expansion joints, flexible connections, and hose assemblies: all types E Strainers, filters, separators, and steam traps F Measuring devices, including pressure gauges, level gauges, sight glasses, tevels, or pressure transmitters C Certified capacity-rated pressure relief devices acceptable as primary over pressure protection on bollers, pressure vessels, piping and fusible plugs H Pressure retaining components that do not fall kido one of the above categories N Nuclear components: Class 1 [] Class 2 [] Class 3 [], (Meeting AECB or ASME requirements)	ASME B31.3 Chapter IX. for unlisted components where applicable
SHOW MANUFACTURERS NAME, TRADEMARK, OR LOGO AS IT WILL APPEAR ON THE PRODUCT	T-05 05 000
Swagelok	FORGED CI WELDED CI WROUGHT & CAST CI OTHER CI DESCRIBE OTHER
LIST OF SUPPORTING DOCUMENTATION AND IDENTIFICATION OF THE ACTUAL ITEMS TO BE RE	GISTERED:
This State of County AD 2011 Resident Portage County OF F Recommendation of the Portage County OF F Recommendation County OF F Recommendation County Public, (sign) And AD 2011 Resident Portage County OF F Recommendation County OF F Recom	ed in this form is true and to the best of als of construction, pressure lards. I further declare that the olant where fabrication occurs in whole
(Affix Official seal to the right)	
This space for Regulatory Authority use This registration must be revalidated after ten (10) years from the dat	o of paraglanes
CRN: OCI 8171.5	Newfoldstlesd Lebredor Service NL
Notes: 1. All fittings shall be registered in the name of the Manufacturer. 2. Each category shall be supported with two Statutory Declaration forms and one copy of supporting documentation. 3. The declaration shall be made by the person having full sutherly and responsibility for the quality of the end product. 4. Quality control programs shall be resubmitted for validation.	Registered 0.1777.50 Date 16.03/21 Engineering and Inspection Services Registered by 1.00 UNDER THE AUTHORITY OF THE PUBLIC SAFETY A AND THE BOXER, PRESCHOOL ISSEL AND COMPRESSED GAS AND LABOUR.

Attachment B1: Scope of CRN Registration for Swagelok IPT Series Check Valves (Category C)

This document represents the scope of the Swagelok IPT Series Check Valve covered by this submission for CRN approval. The Swagelok IPT Series Check Valves were designed and evaluated in accordance with ASME B31.3 Chapter IX, for unlisted components where applicable.

Summary Table

Product Description or Series	Main Pressure Bearing Component	Main Pressure Bearing Material (Standard)	Port Connections and Sizes	Maximum Rated Pressure		Design Code
				At ambient temperature	At maximum temperature	of Construction
CV (soft seat)	Body	ASTM A479	Female NPT 1/4", 3/8", 1/2"	15,000 @ 100F	14,700 @ 250F	ASME B31.3 Chapter IX (For Unlisted Components Where Applicable)
CV (dual seat)	Body	ASTM A479	Female NPT 1/4", 3/8", 1/2"	15,000 @ 100F	14,700 @ 250F	
CV (ball seat)	Body	ASTM A479	Female NPT 1/4", 3/8", 1/2"	15,000 @ 100F	13,900 @ 650F	
CV (soft seat)	Body	ASTM A479	Female NPT 3/4", 1"	10,000 @ 100F	9,800 @ 250F	
CV (dual seat)	Body	ASTM A479	Female NPT 3/4", 1"	10,000 @ 100F	9,800 @ 250F	
CV (ball seat)	Body	ASTM A479	Female NPT 3/4", 1"	10,000 @ 100F	9,300 @ 650F	
CV (soft seat)	Body	ASTM A479	Cone-and-Thread (medium) 1/4", 3/8", 9/16", 3/4", 1"	20,000 @ 100F	19,600 @ 250F	
CV (dual seat)	Body	ASTM A479	Cone-and-Thread (medium) 1/4", 3/8", 9/16", 3/4", 1"	20,000 @ 100F	19,200 @ 250F	
CV (ball seat)	Body	ASTM A479	Cone-and-Thread (medium) 1/4", 3/8", 9/16", 3/4", 1"	20,000 @ 100F	18,600 @ 650F	

Product Illustration



Typical Product Characteristics

Some product options could affect the pressure-temperature ratings shown in the Summary Table, but in all cases the ratings are less than those shown in the Summary Table. An example of this would be optional body seal materials.

Additional options that do not affect pressure-temperature ratings may be made available within the scope of this registration. An example of this would be different poppet springs.

Quality System

The Swagelok Company quality system complies with the requirements of BS EN ISO 9001:2008. In support of this, Swagelok Company maintains British Standards Institution Certificate of Registration Number FM 01729 and HSB Registration Services Certificate of Registration Number HQ-Q-4, which apply to all locations listed on the certificate.

References

The product catalog does not represent the full scope of registration, but rather details some of the most common options.

Medium and High Pressure Valves, Fittings and Tubing Catalog MS-02-472




Attachment B2: Scope of CRN Registration for Swagelok IPT Series Double Block and Bleed Valves (Category C)

This document represents the scope of the Swagelok IPT Series Double Block and Bleed Valve covered by this submission for CRN approval. The Swagelok IPT Series Double Block and Bleed Valves were designed and evaluated in accordance with ASME B31.3 Chapter IX, for unlisted components where applicable.

Summary Table

Product Description or Series	Main Pressure Bearing Component	Main Pressure Bearing Material (Standard)	Port Connections and Sizes	Maximum Rated Pressure		
				At ambient temperatur e	At maximum temperatur e	Design Code of Construction
DB (ball-needle-ball)	Body	ASTM A479	Female NPT 1/4", 3/8", 1/2"	15,000 @ 100F	14,700 @ 250F	ASME B31.3 Chapter IX (For Unlisted Components Where Applicable)
DB (needle-needle- needle)	Body	ASTM A479	Female NPT 1/4", 3/8", 1/2"	15,000 @ 100F	14,700 @ 250F	
DB (ball-needle-ball)	Body	ASTM A479	Cone-and-Thread (medium) 1/4", 3/8", 9/16"	15,000 @ 100F	14,700 @ 250F	
DB (needle-needle- needle)	Body	ASTM A479	Cone-and-Thread (medium) 1/4", 3/8", 9/16"	20,000 @ 100F	19,600 @ 250F	

Product Illustration

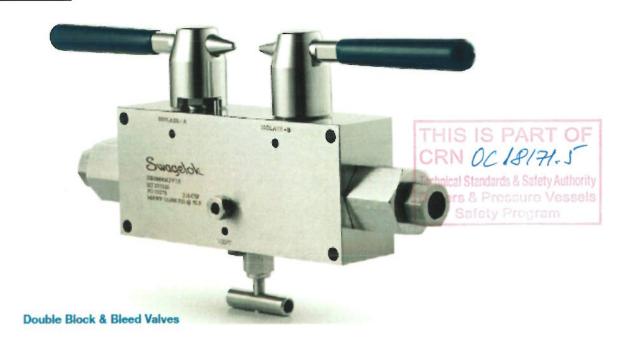

Typical Product Characteristics

Some product options could affect the pressure-temperature ratings shown in the Summary Table, but in all cases the ratings are less than those shown in the Summary Table. An example of this would be optional body seal materials.

Additional options that do not affect pressure-temperature ratings may be made available within the scope of this registration. An example of this would be different handles.

Quality System

The Swagelok Company quality system complies with the requirements of BS EN ISO 9001:2008. In support of this, Swagelok Company maintains British Standards Institution Certificate of Registration Number FM 01729 and HSB Registration Services Certificate of Registration Number HQ-Q-4, which apply to all locations listed on the certificate.

References

The product catalog does not represent the full scope of registration, but rather details some of the most common options.

Medium and High Pressure Valves, Fittings and Tubing Catalog MS-02-249



Attachment B3: Scope of CRN Registration for Swagelok IPT Series Needle Valves (Category C)


This document represents the scope of the Swagelok IPT Series Needle Valve covered by this submission for CRN approval. The Swagelok IPT Series Needle Valves were designed and evaluated in accordance with ASME B31.3 Chapter IX, for unlisted components where applicable.

Summary Table

Product Description	Main Pressure Bearing Component	Main Pressure Bearing Material (Standard)	Port Connections and Sizes	Maximum Rated Pressure		Design Code
				At ambient temperature	At maximum temperature	Construction
NVT	Body	ASTM A479	Female NPT 1/4", 3/8", 1/2"	15,000 @ 100F	14,700 @ 250F	ASME B31.3 Chapter IX (For Unlisted Components Where Applicable)
NVT	Body	ASTM A479	Female NPT 3/4", 1"	10,000 @ 100F	9,800 @ 250F	
NVT	Body	ASTM A479	Cone-and-Thread (medium) 1/4", 3/8", 9/16"	30,000 @ 100F	29,400 @ 250F	

Product Illustration





Typical Product Characteristics

Some product options could affect the pressure-temperature ratings shown in the Summary Table, but in all cases the ratings are less than those shown in the Summary Table. An example of this would be optional body seal materials.

Additional options that do not affect pressure-temperature ratings may be made available within the scope of this registration. An example of this would be different handles.

Quality System

The Swagelok Company quality system complies with the requirements of BS EN ISO 9001:2008. In support of this, Swagelok Company maintains British Standards Institution Certificate of Registration Number FM 01729 and HSB Registration Services Certificate of Registration Number HQ-Q-4, which apply to all locations listed on the certificate.

References

The product catalog does not represent the full scope of registration, but rather details some of the most common options.

Medium and High Pressure Valves, Fittings and Tubing Catalog MS-02-249

