

No. TSD 59.007		
Rev.	Date	
Orig	1/3/13	

CRN REGISTRATION FILE FOR #0H2915.5CR3

PREPARED BY:	RT Gula, Product Design Engineer	DATE	1/9/13
APPROVED BY:	S Kroon, Sr. Project Engineer	DATE	1/10/13
	G.J. Boyce, Quality Assurance Manager	DATE	1/10/13
	RAC for J Lindstrom, Product Mktg Engr	DATE	1/10/13
	M Valachos, Manager Sales & Eng	DATE	1/10/13



REVISION RECORD				
Revision	Affected Paragraphs	Brief Description of Revision	Date	Approval Signature
Orig.	All	Original Release per E.O. QP-13601	1/3/13	RT Gula



TABLE OF CONTENTS

<u>Paragraph</u>	<u>Title</u>	Page No.
1.0	Introduction / Purpose	1
2.0	Reference Documents	1
3.0	CRN #0H2915.5CR3 (Revision 3) Requirements	1
3.1	Fitting Part Numbers Covered	1
3.2	CRN Pressure Ratings	1
3.3	Allowable Material Options	1
4.0	CRN Marking Requirements	4
4.1	CRN Number Designation	5
4.2	CRN #0H2915.5CR3 Certification Packages	5
4.3	CRN Product Marking Requirements for Conax Fittings	5
Арр А	Certification Package for Province of Ontario	
Арр В	Certification Package for Province of British Columbia	
Арр С	Certification Package for Province of Alberta	
App D	Certification Package for Province of Manitoba	
Арр Е	Certification Package for Provinces of Prince Edward Island, Nova Scotia, New Brunswick, Newfoundland & Labrador, Yukon Territory, Northwest Territory, Nunavut	
App F	Certification Package for Provinces of Quebec and Saskatchewan	
App G	Email Correspondence with British Columbia Safety Authority Representative	
Арр Н	Email Correspondence with CSA and ANRIC Representatives	



1.0 Introduction / Purpose:

Conax's CRN Registration Number 0H2915.5CR2 (Revision 2) expired in August 2012. This registration number was valid for ALL Canadian Provinces. During the renewal process for 0H2915, Reference [2.1] was submitted to the Canadian Technical Standards & Safety Authority (TSSA) of Ontario to provide the necessary technical justifications to support approval of a 10-year renewal in ALL provinces. As part of the renewal effort, no new fitting Part Numbers were proposed to be added however new material options were recommended to be added based upon Reference [2.1] technical justifications. Previously only 304, 304L, 316, and 316L SST materials were allowed.

All thirteen (13) Canadian Provinces have granted approval of the 10-year renewal for 0H2915. This document provides a collection of the "certified" paperwork from each Canadian Province which essentially grants approval of CRN Registration Number 0H2915.5CR3 (Revision 3) which will expire on August 2, 2022. Additionally, this document also summarizes the fitting Part Numbers and Material Options covered under CRN 0H2915.5CR3. All applicable documentation (i.e., drawings, catalogs, and laser marking programs) will need to be updated to reflect use of the new material options allowed and the new 0H2915.5CR3 file number.

2.0 Reference Documents:

2.1 Conax TSD 59.006 "CRN Registration Renewal Support Document"

3.0 CRN #0H2915.5CR3 (Revision 3) Requirements:

Consult Reference [2.1] for additional information and technical support.

3.1 Fitting Part Numbers Covered:

Table 1 identifies the fittings covered under CRN #0H2915.5CR3 (Revision 3). These are the same fitting part numbers covered under CRN #0H2915.5CR2 (Revision 2).

3.2 CRN Pressure Ratings:

Table 2 identifies the allowable CRN Pressure Ratings for each fitting based upon the Temperature Range and fitting's NPT Thread Size. These are the same ratings previously covered under #0H2915.5CR2 (Revision 2).

3.3 Allowable Material Options:

Table 3 identifies the material options allowed under CRN #0H2915.5CR3. Previously, CRN #0H2915.5CR2 only allowed fitting bodies to be constructed out of 304, 304L, 316, or 316L SST material per ASTM A479 requirements.



Table 1: Fitting Part Numbers covered under CRN Registration File #0H2915.5CR3

Item	Fitting Part Number (1)	Fitting Description	NPT Fitting Sizes Allowed
1	117-XX-ZZZZCRN	EG-750(CRN)	1-1/2"
2	258-XX-ZZZZCRN	MIC(CRN)	1/16"
3	327-XX-ZZZZCRN	MPG(CRN)	1/8"
4	1448-XX-ZZZZCRN	TG8(CRN), MHC5(CRN)	1/2", 3/4", 1"
5	1896-XX-ZZZZCRN	MHM5(CRN), SPG150(CRN), DSPG(CRN), EG37(CRN), EG50(CRN)	3/4", 1"
6	2447-XX-ZZZZCRN	MTG(CRN), MHC1(CRN)	1/8"
7	5936-XX-ZZZZCRN	EG09(CRN)	1/8"
8	5971-XX-ZZZZCRN	TG14(CRN), MHC4(CRN)	1/4", 1/2"
9	5980-XX-ZZZZCRN	MHM4(CRN), SPG100(CRN), DSPG100(CRN), EG25(CRN), EG31(CRN)	1/2"
10	6032-XX-ZZZZCRN	TG20(CRN), TG24(CRN), MHC2(CRN)	1/4", 3/8"
11	6036-XX-ZZZZCRN	MHM2(CRN), EG12(CRN), EG18(CRN)	1/4", 3/8"
12	6470-XX-ZZZZCRN	PG2(CRN)	1/8", 1/4", 3/8"
13	6477-XX-ZZZZCRN	PL5(CRN)	3/4", 1"
14	6570-XX-ZZZZCRN	PG4(CRN)	1/4", 3/8", 1/2"
15	6574-XX-ZZZZCRN	PG5(CRN)	1/2", 3/4", 1"
16	317729-XX-ZZZZCRN	PG6(CRN)	1"
17	319098-XX-ZZZZCRN	PG7(CRN)	1-1/4"
18	31-0129-XX-ZZZZCRN	MHM6(CRN)	1"

⁽¹⁾ P/N Designation: XX = Numeric Dash Variation (to control fitting variations such as mounting thread and bore size)

ZZZZ = Conax Material Option Code per Table 3

Table 2: CRN Registration File #0H2915.5CR3 Pressure Ratings

Temperature NPT Thread Size			
Range (T)	<u><</u> ¾" NPT	1" NPT	1-¼", 1-½" NPT
T < 220°F	2500 psi	2500 psi	2500 psi
220° < T <u><</u> 850°F	1500 psi	1200 psi	600 psi
850°F < T	Not Allowed	Not Allowed	Not Allowed



Table 3: Fitting Material Options covered under CRN Registration File #0H2915.5CR3

Item	Material	Conax Material Modifier Code	UNS Number	ASTM Material Standard	Minimum Required Yield Strength (2)
1	Monel 400	M400	N04400	B164	25 ksi
2	Monel 405	M405	N04405	B 164	25 ksi
3	Hastelloy X	HX	N06002	B 572	35 ksi
4	Inconel 600	1600	N06600	B 166	35 ksi
5	Inconel 625	1625	N06625	B 446	60 ksi
6	Incoloy 800	INY800	N08800	B 408	30 ksi
7	Hastelloy C276	HC276	N10276	B 574	41 ksi
8	304H SST	S304H	S30409	A 479	30 ksi
9	310S SST	S310S	S31008	A 479	30 ksi
10	310H SST	S310H	S31009	A 479	30 ksi
11	316L SST (NACE)	NC316L	S31603	A 479	25 ksi
12	316 SST (NACE)	NC316	S31600	A 479	30 ksi
13	321 SST	S321	S32100	A 479	30 ksi
14	321H SST	S321H	S32109	A 479	30 ksi
15	347 SST	S347	S34700	A 479	30 ksi
16 ⁽¹⁾	304 SST	S304	S30400	A 479	30 ksi
17 (1)	304L SST	S304L	S30403	A 479	25 ksi
18 ⁽¹⁾	316 SST	S316	S31600	A 479	30 ksi
19 ⁽¹⁾	316L SST	S316L	S31603	A 479	25 ksi

⁽¹⁾ Previously approved under CRN #0H2915.5CR2 (Revision 2)

⁽²⁾ Per 2010 ASME B&PV Code, Section II, Part D, Table Y-1




4.0 CRN Marking Requirements:

4.1 CRN Number Designation:

A Canadian Registration Number (CRN) for a boiler or pressure vessel is defined by CSA B51. It may consist of up to six (6) characters to the left of a decimal point followed by eight (8) or more characters to the right of the decimal point as depicted below.

For Conax Fittings, place holder #1 is the digit 0 (zero) and place holder #2 is the letter H. Place holders #3 - #6 represent a 4 digit sequential number unique to the registration file (e.g. 2915 for Conax Fittings). Place holder #7 is the Province code where the initial registration was filed (i.e., see below 5 = Ontario). Place holder #8 and beyond represent additional provinces where the registration is filed. If the registration is filed in all 13 provinces, place holder #8 can be listed as the letter "C" in lieu of listing each Province code. The expression "R1", "R2", "R3", etc at the end of the registration number signifies the revision level (i.e., "R3" would equate to Revision 3).

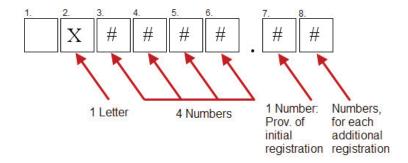

In accordance with CSA B51 the following codes are used for each province:

1 - British Columbia

2 - Alberta *

3 - Saskatchewan

4 – Manitoba

5 – Ontario

6 - Quebec

7 - New Brunswick

8 - Nova Scotia

9 - Prince Edward Island

0 - Newfoundland & Labrador

T - Northwest Territories

Y - Yukon Territory

N - Nunavut





4.2 CRN #0H2915.5CR3 Certification Packages:

Appendices A - F contain copies of the certification paperwork from each province granting approval of 0H2915.5CR3. The table below identifies the specific Appendix where the certification paperwork can be found for each province(s). For each province this entails copies of the signed and stamped "Statutory Declaration" except for the Province of British Columbia. Through email correspondence with a representative from British Columbia's Safety Authority contained in Appendix G, the Province of British Columbia does not stamp and sign the Statutory Declaration. Therefore Appendix B only contains a copy of their approval letter for the renewal effort.

Appendix	Province (s)
Α	Ontario
В	British Columbia
С	Alberta
D	Manitoba
Е	Prince Edward Island, Nova Scotia, New Brunswick, Newfoundland & Labrador, Yukon Territory, Northwest Territory, Nunavut
F	Quebec and Saskatchewan

4.3 CRN Product Marking Requirements for Conax Fittings:

With registration files provided from each of the thirteen (13) Provinces, use of the 0H2915.5CR3 number is considered acceptable. It is noted that per Appendix F, the registration for the Provinces of Quebec and Saskatchewan was conducted by CSA International and the prefix "CSA" should be added to the beginning of the CRN number as CSA-0H2915.56R3. However, when using the letter "C" to denote registration in all provinces, it is not required to use the prefix "CSA" as confirmed through email correspondence with representatives from CSA and ANRIC as contained in Appendix H. As such, Conax fittings identified in Table 1 shall be marked as follows:

CONAX TECHNOLOGIES

xxxx PER ASTM yyyy

CRN NO. 0H2915.5CR3

where:

xxxx = Material Description Code per Table 3 yyyy = ASTM Specification per Table 3

Marking Examples:

For 316 SST:

CONAX TECHNOLOGIES S316 PER ASTM B479 CRN NO. 0H2915.5CR3 For Hastelloy C276:

CONAX TECHNOLOGIES HC276 PER ASTM B574 CRN NO. 0H2915.5CR3

END OF DOCUMENT



Certification Package for Province of Ontario





14th Floor, Centre Tower 3300 Bloor Street West Toronto, Ontario Canada M8X 2X4 Tel.: 416,734,3300 Fax: 416,231,1625

Toll Free: 1.877.682,8772

www.tssa.org

August 02, 2012

ROBERT GULA CONAX TECHNOLOGIES LLC 2300 WALDEN AVE BUFFALO NY 14225

Service Request Type:

BPV-Fitting Registration

Service Request No.:

801288

Your Reference No.:

RENEW CRN 0H2915.5 - NAT'L SERV.

Dear Mr Gula,

Technical Standards and Safety Authority (TSSA) is pleased to inform you that your submission on April 30, 2012 has been reviewed and registered as follows:

CRN No.:

0H2915.5R3

Reference No.:

RENEW CRN 0H2915.5 - NAT'L SERV.

Main Design No.:

TSD REPORT # 59.006

Expiry Date:

02-Aug-2022

Please be advised that a valid quality control system must be maintained for the fitting registration to remain valid until the expiry date.

Scope of registration includes document entitled CRN Registration Renewal Support Document and drawing package defining materials, dimensions, temperatures and MAWP

A stamped copy of the approved registration and invoice for engineering services will be mailed to you shortly. Should you have any questions or require further assistance, however, please contact a Customer Service Advisor at 1.877.682.TSSA (8772) or e-mail customerservices@tssa.org. We will be happy to assist you. When contacting TSSA regarding this file, please refer to the Service Request number provided above.

Yours truly,

Gerry Goettl

D. Doetl

Tel. No.: 416-734-3429 Fax. No.: 416-231-6183 ggoettl@tssa.org

Putting Public Safety First





TECHNICAL STANDARDS & SAFETY AUTHORITY 14th Floor, Centre Tower 3300 Bloor Street West Toronto, Ontario Canada MBX 2X4 Show facsimile of manufacturer's logo or trademark, as it will appear on the fitting, in the space below "Conax Technologies

XXX per ASTM YYYY" XXX = TSD 59.006 Material Code YYYY = Specification Number

	ORY DECLARATION gistration of Fittings
Robert Gula (Product Design Engineer)	
(Name and Position, e.g. I	President, Plant Manager, Chief Engineer)
of Conax Technologies LLC	
(Na	me of Manufacturer)
ocated at 2300 Walden Avenue; Buffalo NY 14225	716-684-4501 x385 716-684-7433
(Plant Address)	(Talephane No.) (Fax No.)
do solemnly declare that the fittings listed hereunder, and Pressure Vessels Regulation, comply with all of	, which are subject to the Technical Standards and Safety Act , Boile f the requirements of
	red North American Standard)
which specifies the dimensions, materials of construction,	pressure/temperature ratings, identification marking the fittings and service;
Proof Pressure Test as supported by pressure/temperature ratings and the basis for such ratings.	North American standard and are therefore manufactured to comply will be attached data which identifies the dimensions, material of construction attings, the marking of the fitting for identification and service. Folled by a quality system meeting the requirements of ISO 9001:2008
which has been verified by the following aut	thority, SGS
The items covered by this declaration, for which I seek registration	[1] [1] [1] [1] [1] [1] [1] [1] [1] [1]
this application, the following information and/or test data are attac Conax TSD Report #59.006 Rev. Orig	hed as follows:
	alculations, test reports, etc.)
Declared before me at Suffale	in the state officer york
the 27th day of april AD 20, Commissioner for Oaths: PATRICE MARION KATANSKY (Printed name) (Signature)	PATRICE MARION KOTANSKY Notary Public, State of New York Qualified in Niagara County My Commission Expires July 31,2013
	Service and the first of the fi
FOR O To the best of my knowledge and belief, the application meets of the second seco	essels Regulation, and hority Safety Program
CRN: 042915,5R3	
Registered by:	CRN 0H2915,523